

Zig Zag Quilt

Not For Resale

Designed by Fran Morgan

Finished Size: 46" x 58"

Fabric	Yardage
3 coordinating fabrics	3, 1 yd cuts
Backing Fabric	3 yds.
<i>Chenille By The Inch</i> [®]	
Color	Amount
Color to coordinate with fabric	800"
Other Materials	
Twin-size cotton batting	
Sewing thread to match fabric; invisible quilting thread	
<i>Chenille Brush</i> [™] & <i>Chenille Cutting Guide</i> [™]	
Spray bottle with water & fabric softener	

Note: WOF means "width of fabric." Seam allowance is 1/4" throughout. Press seams open. This quilt is intended as an economy quilt designed to utilize fabric most efficiently. To make a larger quilt, purchase multiple, matching bundles of fabric from www.fabriccafe.com.

Cutting

From fabric #1:
24, 7" x 7" blocks

From fabric #2:
24, 7" x 7" blocks

From fabric #3:
5, 5 1/2" x WOF for border
5, 1 1/4" x WOF for binding

From Backing Fabric:
54" x WOF

Step 1

Cut the 7" x 7" squares corner to corner to make 48 half square triangles. With right sides together, sew one fabric #1 and one fabric #2 triangle together along long edge, press seams open. Trim blocks to 6 1/2". Assemble quilt top by sewing eight rows of six blocks each, rotating blocks as shown in Assembly Diagram, press seams open. Sew rows together, press seams open.

Step 2

Sew fabric #3, 5 1/2" strips together end to end. Sew strip to each side of quilt, trimming even with top and bottom. Sew strip to each top and bottom, trimming even with sides.

Optional: Quilt your quilt while you embellish the surface of your quilt with *Chenille By The Inch*[®]. The next steps tell you how. Visit www.fabriccafe.com and enter **tutorial** in the search box to watch a tutorial.

Step 3

Layer quilt top, batting and backing. Pin layers together, avoiding seamlines. Remove tear-away backing from *Chenille By The Inch*[®]. Using the *Chenille Cutting Guide*[™], and cutting between the stitched lines with a rotary cutter, cut into strips. Using a walking foot, and stitching through all layers, sew *Chenille By the Inch*[®] strips to all diagonal and border seams back tacking at beginning and end of each strip and overlapping ends 1/8" when adding a new strip.

Step 4


After quilting as desired, trim backing and batting even with quilt top. For binding, sew 1 1/4" x WOF binding strips together end to end. Press strip in half, wrong side

Fabric Café
12973-C Hwy. 155 S. Tyler, Texas 75703 (903) 509-5999


Copyright Fabric Cafe 2008

www.fabriccafe.com

Assembly Diagram

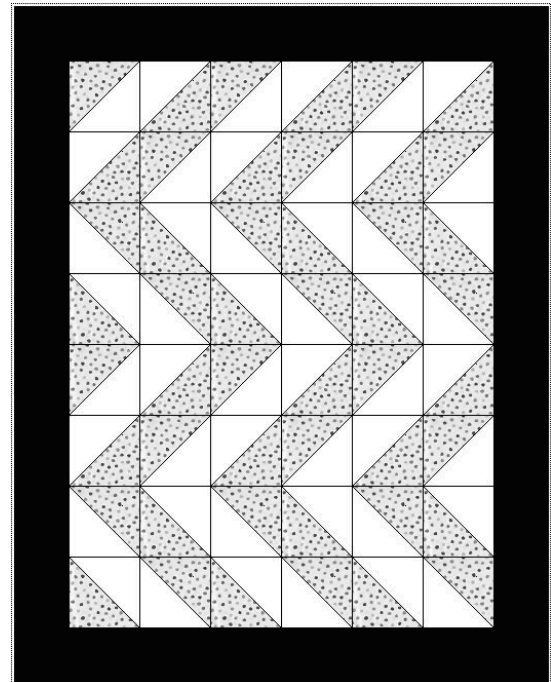

Fabric Selection Guide

Fabric # 1  Fabric # 2  Fabric # 3 

together and matching raw edges. Press one raw edge into center fold. With right sides together, matching unpressed raw edge to raw edge of quilt and using a scant 1/4" seam, sew binding to quilt mitering corners. Press to wrong side, hand stitch in place.

Step 5

Using a spray bottle with 3 or 4 drops of fabric softener added to 8 oz. of water, dampen sewn *Chenille By The Inch*[®] strips; using a *Chenille Brush*[™], brush vigorously to fluff chenille.

