


Not for Resale. Thank you gift to our subscribers.

Tumbling Triangles

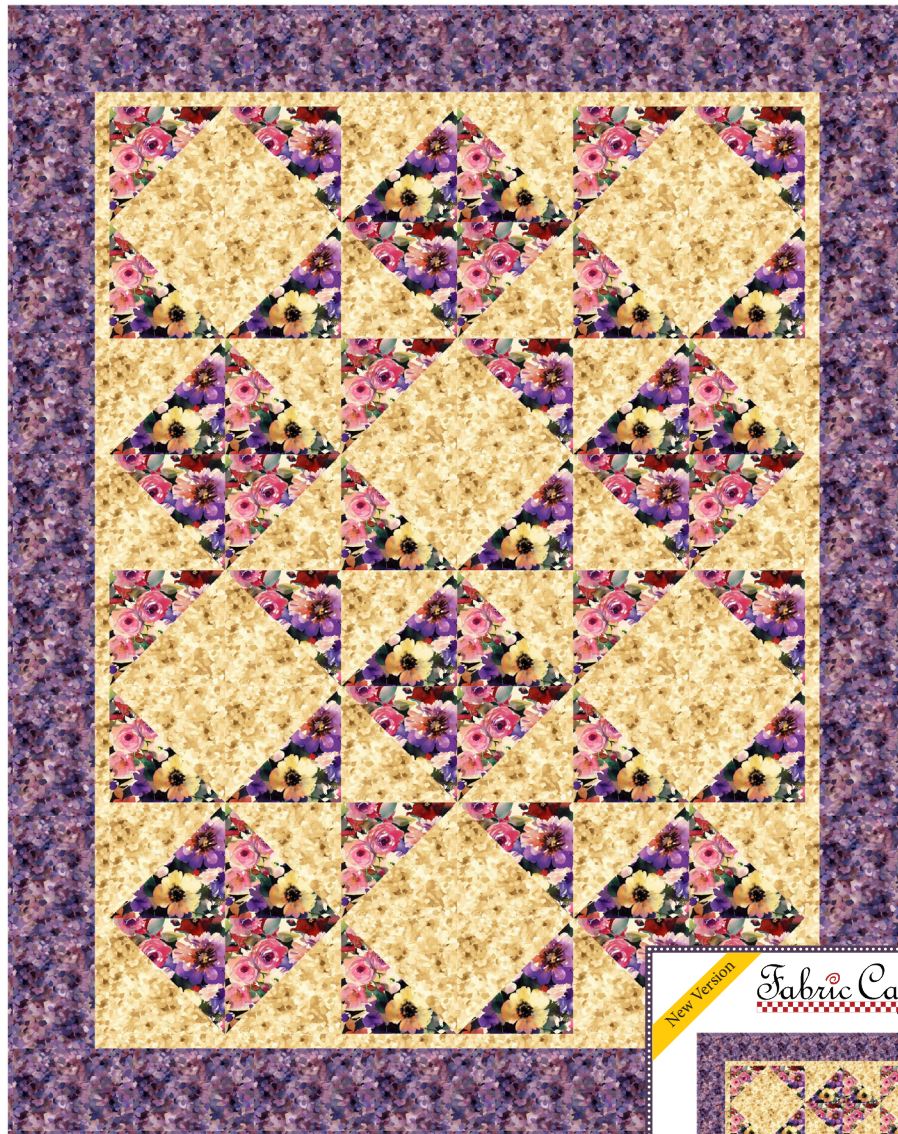

Fabric Café

Putting the Fun Back in Quilting!



Putting the Fun Back in Quilting!



*A personal letter: from
Donna Robertson &
Fran Morgan, owners
and designers for Fabric
Café!*

Thank you for downloading our free pattern! We hope you will enjoy making your new quilt. We think you will find the instructions easy to follow and that the end results of your new quilt will be to your satisfaction. Should you have any questions or need our assistance, please don't hesitate to contact us at welisten@fabriccafe.com or call us toll-free 866-855-0998.

Please note that this pattern and the images within are copyrighted by Fabric Café with all rights reserved. Please do not copy and share.


Donna Robertson

Fran

New Version

Fabric Café

091420-01

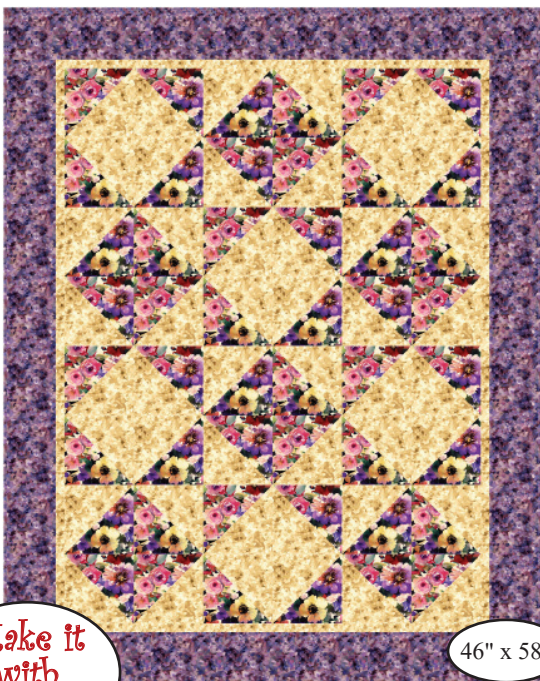

Make it
with
3 yards

46" x 58"

Tumbling Triangles

Tumbling Triangles

Materials List

Quilt Top

- 3 coordinating fabrics of 3, 1 yard cuts

Backing Fabric

- 3 yards of fabric

Other Materials

- Twin-size batting
- Sewing thread to match fabric

This is an economy quilt designed to efficiently utilize 44" wide fabric. A single fold binding is used. An additional ½ yard of fabric is needed for a double fold binding. Binding Tutorial available at fabriccafe.com. WOF means "width of fabric".



Printed in the USA

Fabric Café

Copyright Fabric Cafe 2014
www.fabriccafe.com



8 50029 30619 1

Tumbling Triangles

Designed by Donna Robertson

Finished Size 46" x 58"

Cutting Instructions

From Fabric #1:

* Cut 4, 7" x WOF; from these strips, cut 24, 7" x 7" squares for **Half Square Triangle (HST) Assembly**

From Fabric #2:

* Cut 4, 7" x WOF; from these strips, cut 24, 7" x 7" squares for **HST Assembly**

* Cut 5, 1 1/4" x WOF for border #1

From Fabric #3:

* Cut 5, 4 3/4" x WOF for border #2

* Cut 5, 1 1/4" x WOF for binding

From Backing Fabric:

* Cut 2, 54" x WOF

Step 3: Quilt Assembly

Referring to **Quilt Assembly** diagram, sew **Sections** together.

Step 4: Borders

For border #1, using fabric #2, 1 1/4" x WOF border strips, sew together end to end. Sew strip to each side of quilt; trim even with top and bottom. Using remainder of strip, sew to top and bottom; trim even with sides. For border #2, repeat using fabric #3, 4 3/4" x WOF border strips.

Step 5: Backing & Binding


Sew backing fabric together along trimmed selvage edges; press. Layer top, batting and backing together; quilt as desired. For binding, using fabric #3, 1 1/4" x WOF binding strips, sew strips together end to end. Press in half with wrong sides together; press one raw edge to center fold. Place right side of binding to front side of quilt. Using a scant 1/4", sew unpressed edge of binding to quilt, mitering corners. Fold to back and hand stitch in place.

Step 1: HST Assembly

Referring to **HST Assembly** diagram, using a fabric marking pen, draw a line diagonally from corner to corner on wrong side of fabric #2, 7" x 7" squares. Using one each of fabric #1 and #2, 7" x 7" squares for each **HST Assembly**, place right sides together. Sew a scant 1/4" on each side of line. Cut on drawn line; press blocks open. Trim and square blocks to 6 1/2" x 6 1/2". Repeat making 48, 6 1/2" x 6 1/2" **HST Blocks**.

Step 2: Row Assembly


Referring to **Row Assembly** diagram, rotating **HST Blocks** as shown, assemble 2 each of **Row 1** through **Row 4**. Using one each of **Row 1** through **Row 4**, sew rows together; repeat making 2 **Sections**.



Draw line from corner to corner. Sew a scant 1/4" on each side of line. Cut on drawn line


HST Assembly

Finished HST Block




Make 48, 6 1/2" x 6 1/2" **HST Blocks**


Quilt Assembly

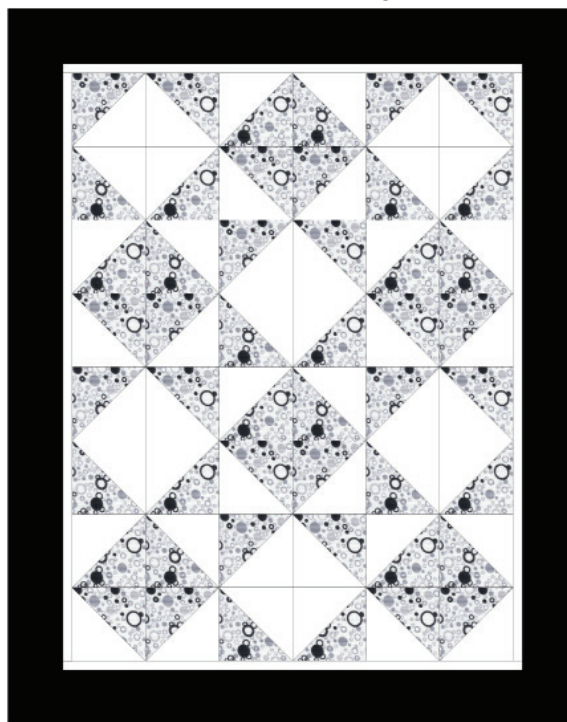

Fabric Selection Guide



Row Assembly

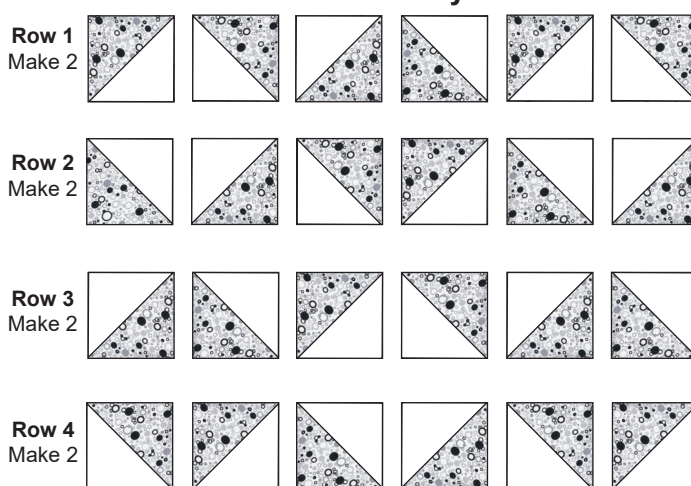

For **Section Assembly**, sew one **Row 1** through **Row 4**. Repeat making 2 **Sections**

Fabric Café

Copyright Fabric Cafe 2014
www.fabriccafe.com